




The 10T is designed to mount on a 2 ton or larger truck. Total pump hoist weight is approximately 7,000 lbs. A deck, headache rack and toolboxes add approximately 3,000 lbs.

Controls are conveniently located at the left rear corner of the machine in close proximity to the work area.

The deck remains open for cargo.

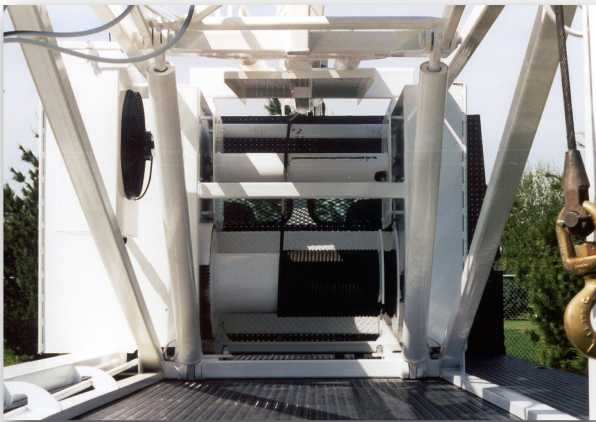

The tailout winch is used for extending the mast and for tailing out pipe or column, or for pulling submersible pumps. The tailout winch is power-up and power-down. It has a 2,500 lb. lifting capacity at 150 feet per minute and also incorporates a failsafe brake.

Standard specifications

Maximum mast height: 36 ft.
Maximum layback: 11 ft.
Capacity with 3-part line: 27,000 lbs.
Capacity with single line: 9,000 lbs.
Mainline cable: 5/8 in. x 150 ft.
Tailout cable: 3/8 in. x 125 ft.
Mainline cable speed: 140 ft./min.
Sandline cable speed: 450 ft./min.
Hydraulic pump: 2 stage gear

Standard features

Failsafe brake system
Direct mounted PTO and pump
Tailout winch
Rear outriggers with holding valve
Holding valve on mast cylinders
Ring and pinion driven main winch
Line block
7 ton and 15 ton hooks
Controls on left rear corner
Gray paint

Optional features

Sandline winch
Oil cooler
Cathead
Breakout wrench
Front hydraulic outriggers
Extended mast height
Custom paint color
Corded remote control
Wireless remote control
Tailgate
Tool boxes
Mast lights
Walking beam
Other options available on request



Hunke Manufacturing LLC

PO Box 128 • Snyder, NE 68664

Phone: 402-568-2221 • Fax: 402-568-2223

E-mail: sales@hunkemfg.com • Website: www.hunkemfg.com