

12T Hydraulic Pump Hoist

33,000 lb. capacity


36 ft. high telescoping mast

11 ft. maximum layback

The main winch has a 33,000 lb. capacity with a 3 part line. 11,000 lb. single line capacity at a maximum speed of 140 feet per minute. The winch drum has a cable storage section with enough drum width to spool a 3-part line on a bare drum. Mainline cable is 5/8 in. x 150 ft.

The optional sandline winch is operated power-up and power-down. It can be switched between a 7,000 lb. bare spool capacity at a maximum speed of 200 feet per minute or 3,500 lb. capacity at 400 feet per minute. The sandline winch has a capacity of 1,700 ft. of 1/2 in. cable, 2,275 ft. of 7/16 in. cable or 3,000 ft. of 3/8 in. cable.

Both winches incorporate a fail-safe brake.

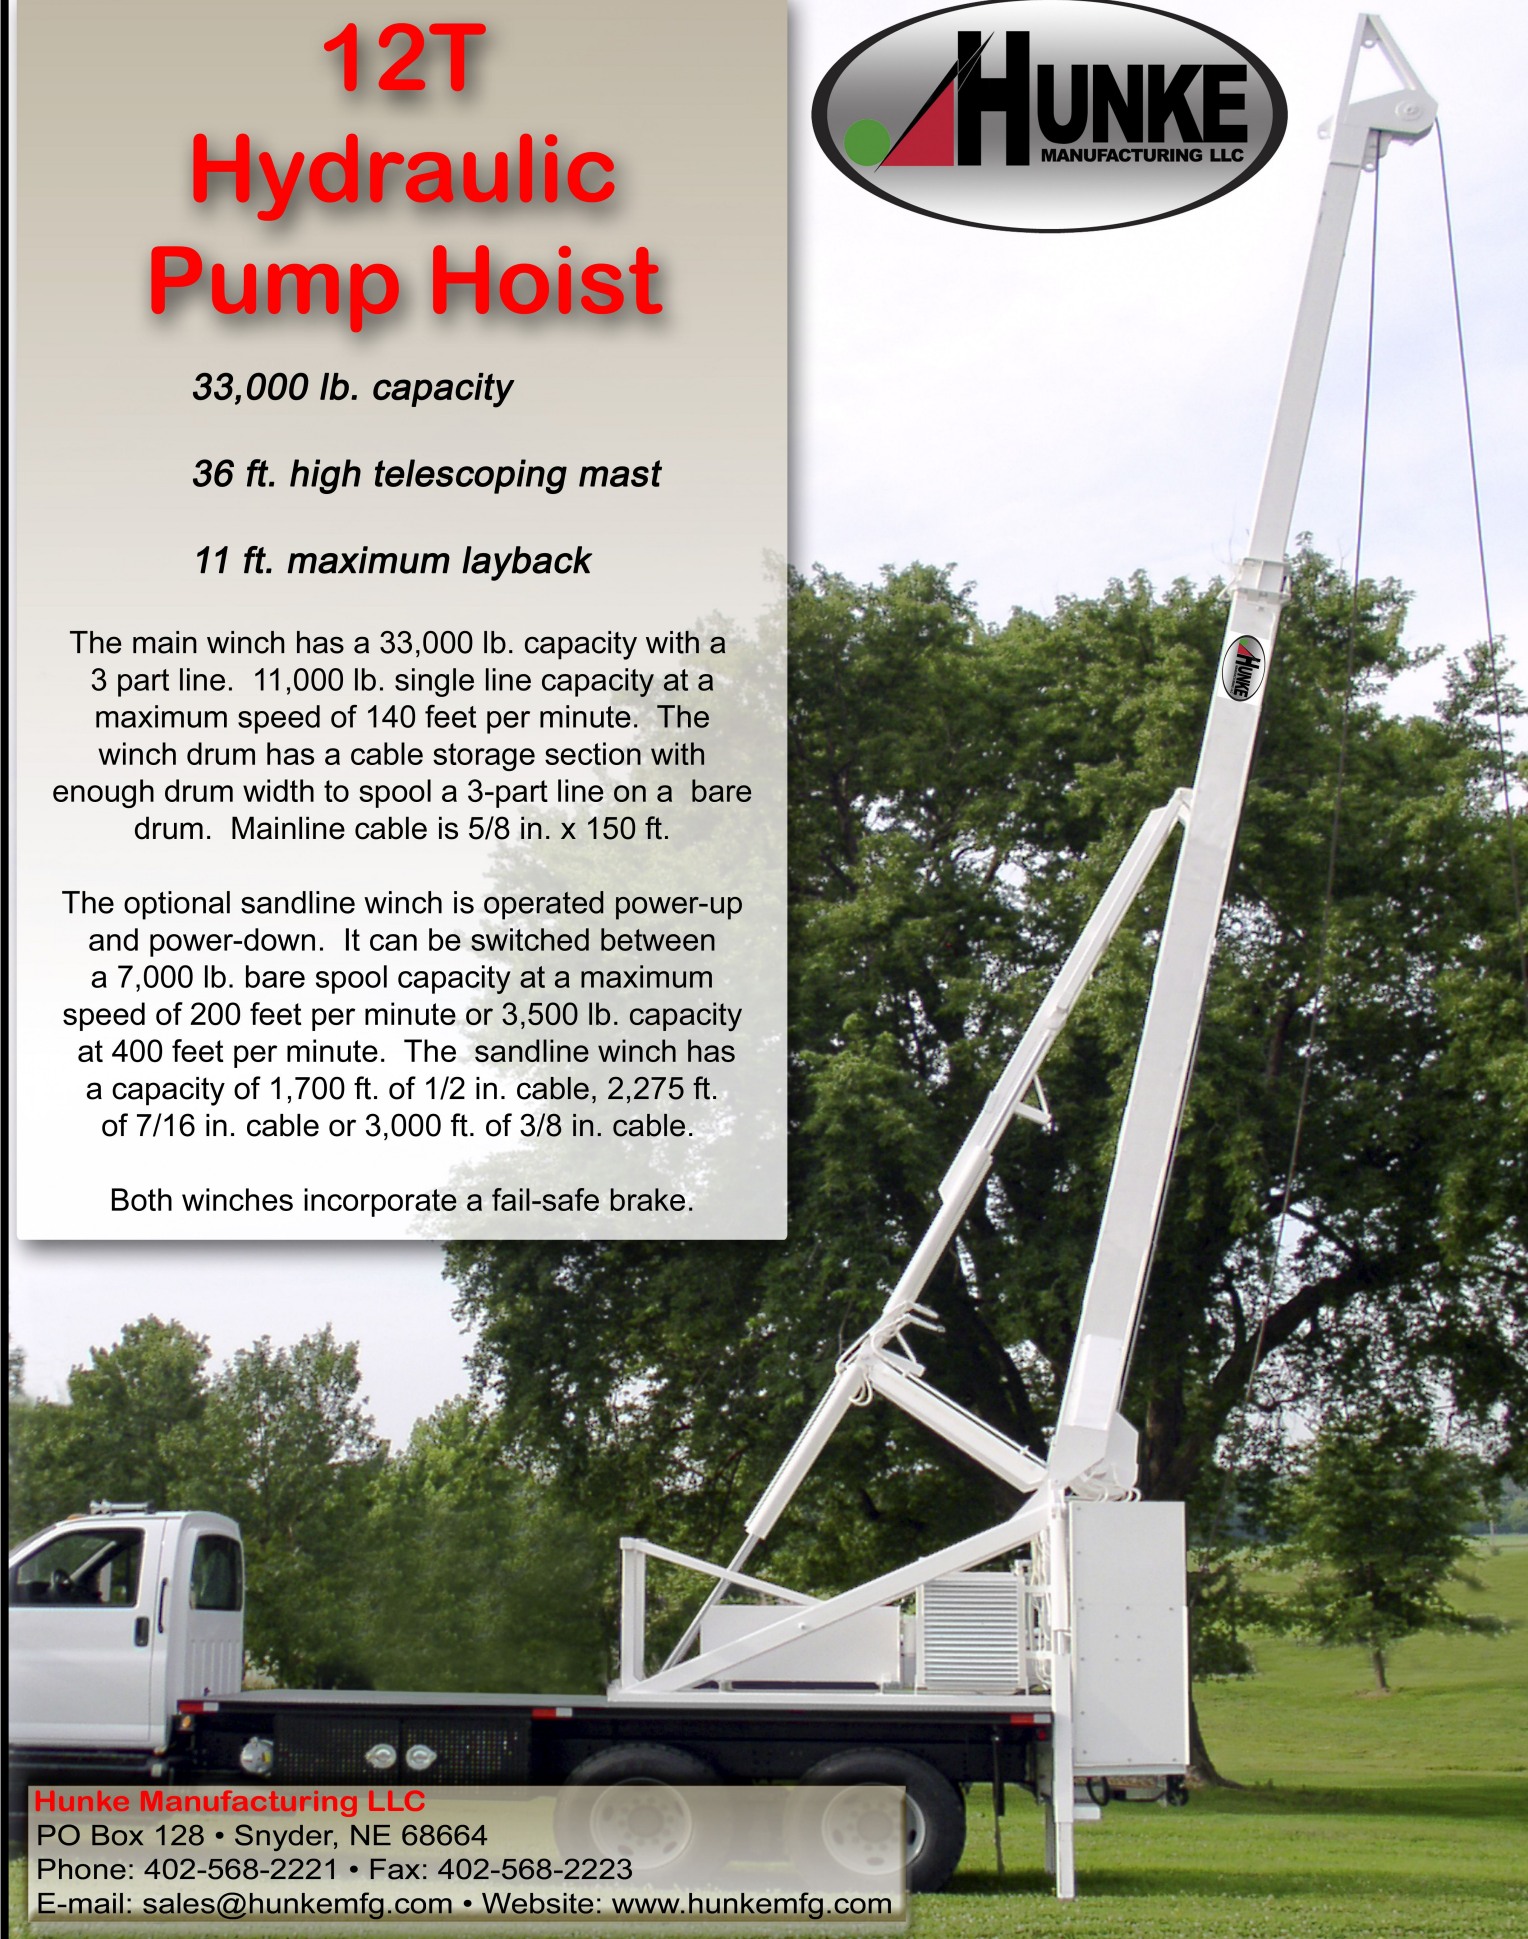

Hunke Manufacturing LLC

PO Box 128 • Snyder, NE 68664

Phone: 402-568-2221 • Fax: 402-568-2223

E-mail: sales@hunkemfg.com • Website: www.hunkemfg.com